



PALM TECHNOLOGY CO., LTD.

The LCD(M) Specialist

CONTACT ADDRESS : 14F~15F, No.383, Yangming Rd.,Samin District,
Kaohsiung City 807,Taiwan(R.O.C)
Tel: 886-7-3983966
Fax: 886-7-3982966
E-mail: sales@palmtech.com.tw

PART NO. : PMC24021AA-SERIES

FOR MESSRS. : _____

CONTENTS

| <i>NO.</i> | <i>ITEM</i> | <i>PAGE</i> |
|-------------------|----------------------------|--------------------|
| 1. | COVER | 1 |
| 2. | RECORD OF REVISION | 2 |
| 3. | GENERAL SPECIFICATION | 3 |
| 4. | MECHANICAL DATA | 4 |
| 5. | ABSOLUTE MAXIMUM RATINGS | 5 |
| 6. | ELECTRICAL CHARACTERISTICS | 6 |
| 7. | OPTICAL CHARACTERISTICS | 7 |
| 8. | OUTLINE DIMENSION | 8 |
| 9. | BLOCK DIAGRAM | 9 |
| 10. | POWER SUPPLY FOR LCM | 9 |
| | | |
| | | |

ACCEPTED BY : PROPOSED BY :

RECORD OF REVISION

| DATE | PAGE | SUMMARY |
|------|------|---------|
| | | |

3. General specifications

3.1 General specifications

PLEASE REFER TO:

“CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS (MS-10-12780)”.

3.2 This individual specification is prior to general specifications

3.3 NUMBERING SYSTEM

PMC24021A

| | |
|---|---|
| B | W |
|---|---|

 A-

| | | | | | |
|---|---|---|---|---|---|
| S | Y | M | L | W | U |
|---|---|---|---|---|---|

(1) (2) (3) (4) (5) (6) (7) (8)

(1).CHARACTER FONTS :

PLEASE REFER TO

“CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS (MS-10-0069)”

(2).LCM TEMPERATURE :

“nil” : NORMAL TEMP

“W” : WIDE TEMP

(3).LCD TYPE :

“T” : TN TYPE

“S” : STN TYPE

“H” : HTN TYPE

“F” : FSTN TYPE

(4).LCD COLOR :

“Y” : YELLOW-GREEN “B” : BLUE(STN/NEGATIVE)/BLACK(FSTN/NEGATIVE)

“G” : GRAY “W” : WHITE(FSTN/POSITIVE)

(5).LCD POLARIZE TYPE

“nil” : TRANSFLECTIVE

“M” : TRANSMISSIVE

(6).BACKLIGHT TYPE :

“L” : LED BACKLIGHT

(7).BACKLIGHT COLOR :

LED TYPE :

“nil” : YELLOW-GREEN

“A” : AMBER

“B” : BLUE

“G” : PURE-GREEN

“O” : ORANGE

“R” : RED

“W” : WHITE

(8).VIEWING DIRECTION :

“nil” : 6 O’CLOCK

“3” : 3 O’CLOCK

“U” : 12 O’CLOCK

“9” : 9 O’CLOCK

4. *Mechanical data*

- (1) NUMBER OF CHARACTERS-----24 CH * 2 LINE
- (2) MODULE SIZE -----118.0 W * 36.0 H * 10.0 T (Max) mm
- (3) EFFECTIVE AREA -----96.0 W * 18.8 H mm
- (4) CHARACTER PATTERN -----5 * 7 DOTS + CURSOR
- (5) CHARACTER SIZE-----3.20 W * 4.85 H mm
- (6) CHARACTER PITCH-----3.70 mm
- (7) DOT SIZE-----0.60 W * 0.65 H mm
- (8) DOT PITCH -----0.70 W * 0.65 H mm

5. Absolute maximum ratings

5.1 Electrical absolute maximum ratings

| <i>I T E M</i> | <i>SYMBOL</i> | <i>MIN.</i> | <i>MAX.</i> | <i>UNIT</i> | <i>COMMENT</i> |
|------------------------|----------------------------------|-----------------|-----------------|-------------|----------------|
| POWER SUPPLY FOR LOGIC | V _{DD} -V _{SS} | 0 | 6.0 | V | ----- |
| INPUT VOLTAGE | V _I | V _{SS} | V _{DD} | V | ----- |
| STATIC ELECTRICITY | ----- | ----- | 100 | V | NOTE (1) |

NOTE (1): ELECTRO-STATIC DISCHARGE RESISTANCE IS TESTED BY CHARGING A 200PF CAPACITOR AND DISCHARGING IT BY CONTACT WITH A INTERFACE CONNECTOR PIN.

5.2 Environmental absolute maximum ratings

| <i>I T E M</i> | <i>CONDITION</i> | <i>OPERATING</i> | | <i>STORAGE</i> | | <i>COMMENT</i> |
|-----------------------|------------------|------------------|-------------|----------------|-------------|---|
| | | <i>MIN.</i> | <i>MAX.</i> | <i>MIN.</i> | <i>MAX.</i> | |
| AMBIENT TEMPERATURE | NORMAL | 0 | 50 | -20 | 70 | ----- |
| | WIDE | -20 | 70 | | | |
| HUMIDITY | ----- | NOTE (2) | | NOTE (2) | | NO CONDENSATION |
| VIBRATION NOTE (3) | ----- | ----- | 0.5G | ----- | 2G | 10~300Hz XYZ DIRECTIONS 1 Hr EACH |
| SHOCK NOTE (3) | ----- | ----- | 3G | ----- | 50G | 10 msec XYZ DIRECTIONS 1 TIME EACH |
| CORROSIVE GAS | ----- | NOT ACCEPTABLE | | NOT ACCEPTABLE | | ----- |

NOTE (2): Ta = 50 : 90% RH MAX.

Ta > 50 : ABSOLUTE HUMIDITY MUST BE LOWER THAN THE HUMIDITY OF 90% RH AT 50 . (80%RH AT 60)

NOTE (3): 1G = 9.8 m/s²

6. Electrical characteristics

$T_a = 25$

$V_{DD} = 5.0 \pm 0.25 V$

| <i>I T E M</i> | <i>SYMBOL</i> | <i>CONDITION</i> | <i>MIN.</i> | <i>TYP.</i> | <i>MAX.</i> | <i>UNIT</i> | |
|--|---------------------------------|--|-----------------------|-------------|-------------|-------------|---|
| INPUT VOLTAGE | V _{IH} | ----- | 2.2 | ----- | ----- | V | |
| | V _{IL} | | ----- | ----- | 0.6 | V | |
| OUTPUT VOLTAGE | V _{OH} | -I _{OH} = 0.2 mA | 2.4 | ----- | ----- | V | |
| | V _{OL} | I _{OL} = 1.2 mA | ----- | ----- | 0.4 | V | |
| POWER SUPPLY CURRENT | I _{DD} | V _{DD} = 5.0V | ----- | 1.5 | 3.0 | mA | |
| RECOMMENDED LCD DRIVING VOLTAGE, NOTE(1) | V _{DD} -V _O | STN/ FSTN DUTY =1/16 =10° NOTE(2) | T _a =-20°C | ----- | 4.8 | ----- | V |
| | | | T _a = 0°C | ----- | 4.7 | ----- | V |
| | | | T _a = 25°C | ----- | 4.5 | ----- | V |
| | | | T _a = 50°C | ----- | 4.3 | ----- | V |
| | | | T _a = 70°C | ----- | 4.2 | ----- | V |
| | | TN DUTY =1/16 =25° NOTE(2) | T _a =-20°C | ----- | 4.5 | ----- | V |
| | | | T _a = 0°C | ----- | 4.4 | ----- | V |
| | | | T _a = 25°C | ----- | 4.2 | ----- | V |
| | | | T _a = 50°C | ----- | 4.0 | ----- | V |
| | | | T _a = 70°C | ----- | 3.9 | ----- | V |
| POWER SUPPLY CURRENT FOR LED | I _{LED} | V _{DD} = 5.0V | ----- | 30 | 40 | mA | |

NOTE (1): RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT ±0.5V BY EACH MODULE.

- (2): = 0° : VIEWING DIRECTION AT 6 O’CLOCK
 = 180° : VIEWING DIRECTION AT 12 O’CLOCK

7. Optical characteristics

TN TYPE LCD

$T_a = 25$ $V_{DD}-V_O = 4.2V$

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------|-----------|--------------------|------|------|------|------|---------|
| VIEWING ANGLE | 2- 1 | K = 1.4 NOTE(1) | 20 | 30 | ---- | deg. | NOTE(2) |
| CONTRAST RATIO | K | = 25° NOTE(1) | 2.0 | 3.0 | ---- | ---- | NOTE(2) |
| RESPONSE TIME | tr (rise) | = 25° NOTE(1) | ---- | 150 | 250 | ms | NOTE(2) |
| | tf (fall) | = 25° NOTE(1) | ---- | 150 | 250 | ms | NOTE(2) |

STN TYPE LCD

$T_a = 25$ $V_{DD}-V_O = 4.5V$

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------|-----------|--------------------|------|------|------|------|---------|
| VIEWING ANGLE | 2- 1 | K = 2.0 NOTE(1) | 30 | 40 | ---- | deg. | NOTE(2) |
| CONTRAST RATIO | K | = 10° NOTE(1) | 3.0 | 4.0 | ---- | ---- | NOTE(2) |
| RESPONSE TIME | tr (rise) | = 10° NOTE(1) | ---- | 200 | 350 | ms | NOTE(2) |
| | tf (fall) | = 10° NOTE(1) | ---- | 300 | 400 | ms | NOTE(2) |

FSTN, STN BLUE TYPE LCD

$T_a = 25$ $V_{DD}-V_O = 4.5V$

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------|-----------|--------------------|------|------|------|------|---------|
| VIEWING ANGLE | 2- 1 | K = 2.0 NOTE(1) | 30 | 40 | ---- | deg. | NOTE(2) |
| CONTRAST RATIO | K | = 10° NOTE(1) | 4.0 | 5.0 | ---- | ---- | NOTE(2) |
| RESPONSE TIME | tr (rise) | = 10° NOTE(1) | ---- | 200 | 350 | ms | NOTE(2) |
| | tf (fall) | = 10° NOTE(1) | ---- | 300 | 400 | ms | NOTE(2) |

Brightness for LED backlight

| SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | LED TYPE | NOTE |
|--------|-----------|------|------|------|-------------------|------------------------------------|---------|
| B | = 0° | 5.0 | ---- | ---- | cd/m ² | YELLOW-GREEN, RED AMBER, ORANGE | NOTE(2) |
| | = 0° | 6.0 | ---- | ---- | | BLUE, WHITE, PURE-GREEN | NOTE(3) |



NOTE (1): = 0° : VIEWING DIRECTION AT 6 O'CLOCK

 = 180° : VIEWING DIRECTION AT 12 O'CLOCK

NOTE (2): SEE CUSTOMER ACCEPTANCE STANDARD SPECIFICATION FOR
DEFINITION OF OPTICAL CHARACTERISTICS.

NOTE (3): UNDER NORMAL TEMPERATURE AND HUMIDITY IN A DARK ROOM.

8. Outline dimension

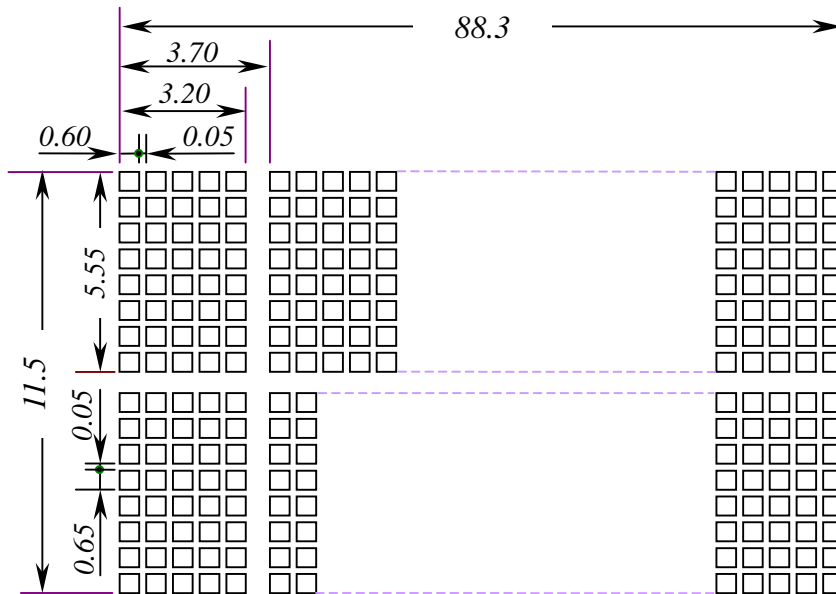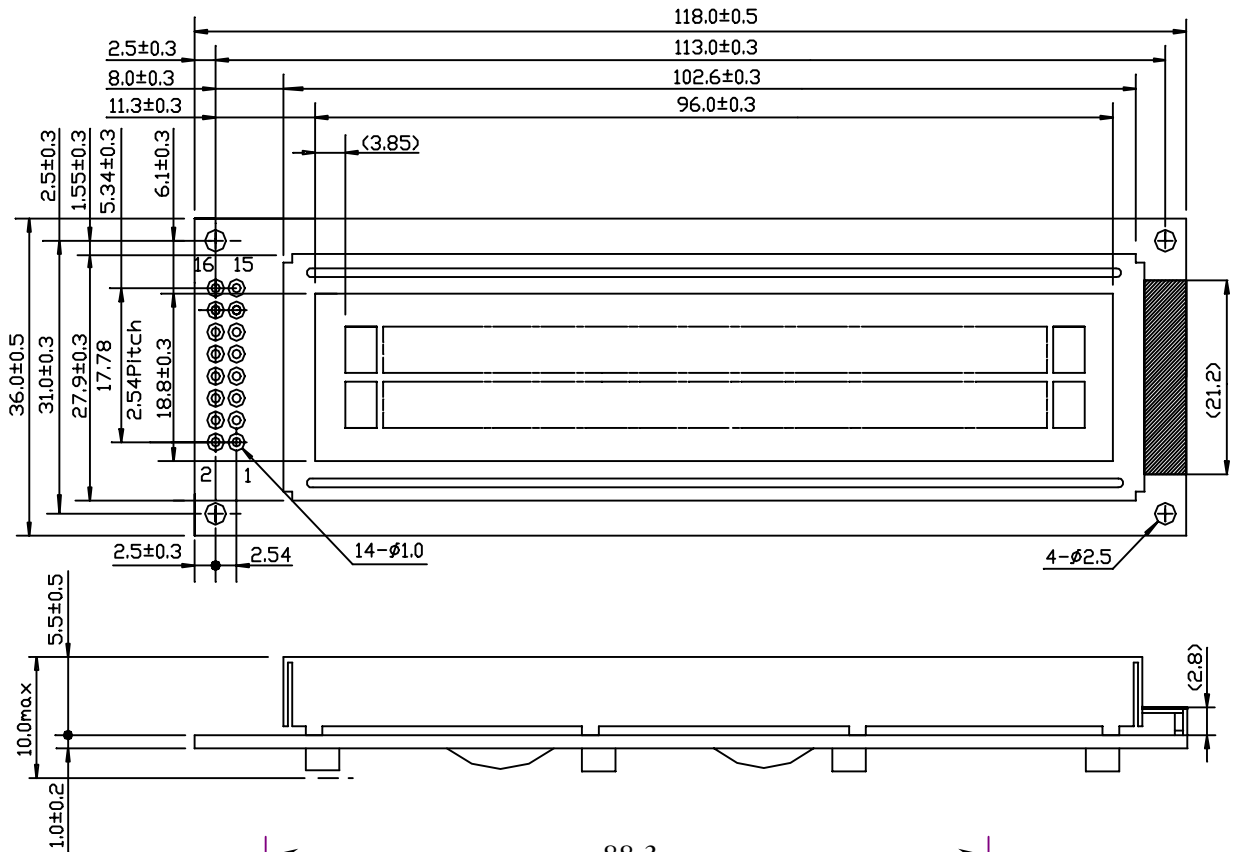


NOTE :

- 1.UNIT : mm
- 2.SCALE : NTS

Interface pin connection

| | | | | | | | | |
|----------------|-----------------|-----------------|----------------|-----------|-----------|-----------|-----------|-----------|
| PIN NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| SYMBOL | V _{SS} | V _{DD} | V _o | RS | R/W | E | DB0 | DB1 |
| PIN NO. | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| SYMBOL | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | NC | NC |

9. Block diagram

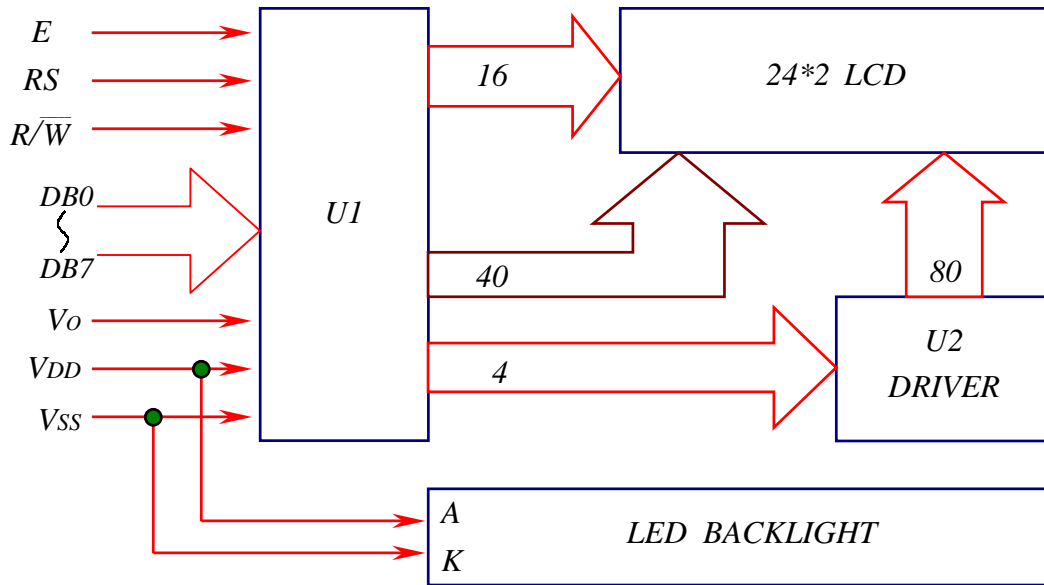


Display data address charts

| Character | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| LINE 1 | 00 | 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 0A | 0B | 0C | 0D | 0E | 0F | 10 | 11 | 12 | 13 |
| LINE 2 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 4A | 4B | 4C | 4D | 4E | 4F | 50 | 51 | 52 | 53 |

| | 21 | 22 | 23 | 24 |
|--------|----|----|----|----|
| LINE 1 | 14 | 15 | 16 | 17 |
| LINE 2 | 54 | 55 | 56 | 57 |

10. Power supply for LCM

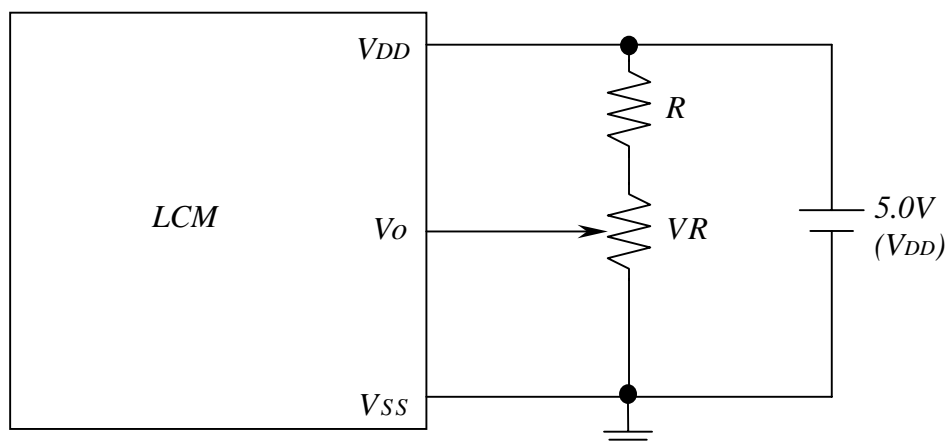

RECOMMENDED RESISTOR R: $V_{DD}-V_O \quad 1.5V$

$V_{DD}-V_O$: LCD DRIVING VOLTAGE

VR: 10K ~20K