

LCD MODULE SPECIFICATION

MODEL NO.

BG320240C series

FOR MESSRS:

ON DATE OF:

APPROVED BY:

C O N T E N T S

1. Numbering System
2. General Specification
3. Absolute Maximum Rating
4. Electrical Characteristics
5. Optical Characteristics
6. Interface Pin Function
7. Block Diagram
8. Timing Characteristics
9. Power supply for LCD Module and LCD operating voltage adjustment
10. Backlight information
11. Touch panel Information
12. Quality Assurance
13. Reliability
14. Drawing

1. Numbering System

<u>B</u>	<u>C</u>	<u>2004</u>	<u>A</u>	<u>G</u>	<u>P</u>	<u>L</u>	<u>E</u>	<u>B</u>	<u>xxx</u>
0	1	2	3	4	5	6	7	8	9

0	Brand		Bolymin						
1	Module Type			C= character type G= graphic type P= TAB/TCP type		O= COG type F= COF type			
2	Format			2002=20 characters, 4 lines 12232= 122 x 32 dots					
3	Version No.			A type					
4	LCD Color			G=STN/gray Y=STN/yellow-green C=color STN		B=STN/blue F=FSTN T=TN			
5	LCD Type			R=positive/reflective P=positive/transflective		M=positive/transmissive N=negative/transmissive			
6	Backlight type/color			L=LED array/ yellow-green H=LED edge/white R=LED array/red G=LED edge/yellow-green		D=LED edge/blue E=EL/white B=EL/blue C=CCFL/white			
7	CGRAM Font (applied only on character type)			J=English/Japanese Font E=English/European Font		C=English/Cyrillic Font H=English/Hebrew Font			
8	View Angle/ Operating Temperature			B=Bottom/Normal Temperature H=Bottom/Wide Temperature U=Bottom/Ultra wide Temperature		T=Top/Normal Temperature W=Top/Wide Temperature C=9H/Normal Temperature			
9	Special Code			3=3 volt logic power supply n=negative voltage for LCD c=cable/connector xxx=to be assigned on data sheet		t=temperature compensation for LCD p=touch panel			

2. General Specification

(1) Mechanical Dimension

Item	Standard Value	Unit
Number of dots	320x240	dots
Outline dimension (W*H*T)	142.0x 96.0 x 17.0max - LED bottom B/L 152.1x 99.1 x 17.0max - LED edge B/L, CCFL 142.0x 96.0 x 17.0max - EL or No B/L	mm
View area	104.0(W)x 79.3(H)	mm
Active area	95.97(W)x 71.97(H)	mm
Dot size	0.27(W)x 0.27(H)	mm
Dot pitch	0.3(W)x 0.3(H)	mm

(2) Controller IC: No built-in Controller (Recommended controller: SED1335)

(3) Temperature Range

	Normal	Wide
Operating	0 ~+50°C	-20 ~+70°C
Storage	-10 ~+ 60°C	-30 ~+80°C

3. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T _{OP}	-20	—	+70	°C
Storage Temperature	T _{ST}	-30	—	+80	°C
Input Voltage	V _I	-0.3	—	V _{DD}	V
Supply Voltage For Logic	V _{DD}	0	—	6.5	V
Supply Voltage For LCD	V _{DD} -V _{EE}	0	—	32	V

4. Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply Voltage For Logic	$V_{DD}-V_{SS}$	—	—	5.0	5.5	V
Supply Voltage For LCD * Wide Temp、Type	$V_{DD}-V_o$	* Ta=-20°C	—	—	23.6	V
		Ta=25°C	—	21.6	—	V
		* Ta=+70°C	19.6	—	—	V
Input High Vol.	V_{IH}	—	0.8V _{DD}	—	V _{DD}	V
Input Low Vol.	V_{IL}	—	0	—	0.2V _{DD}	V
Output High Vol.	V_{OH}	—	V _{DD} -0.4	—	—	V
Output Low Vol.	V_{OL}	—	—	—	0.4	V
Supply Current	I_{DD}	V _{DD} =5V	—	45	50	mA

5. Optical Characteristics

a. FSTN


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V) θ	CR \geq 3	10		120	deg
	(H) φ	CR \geq 3	-45		45	deg
Contrast Ratio	CR	—		5		—
Response Time	T rise	—		200	300	ms
	T fall	—		150	200	ms

b. STN

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V) θ	CR \geq 3	10	—	105	deg.
	(H) φ	CR \geq 3	-30	—	30	deg.
Contrast Ratio	CR	—	—	3	—	—
Response Time	T rise	—	—	200	300	ms
	T fall	—	—	150	200	ms


5.1 Definitions

■ View Angles

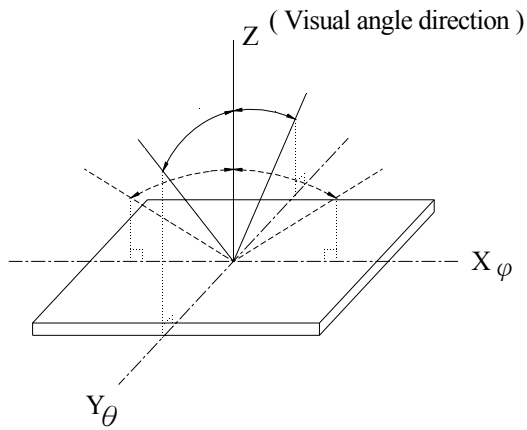


■ Contrast Ratio

$$CR = \frac{\text{Brightness at selected state (BS)}}{\text{Brightness at non-selected state (Bns)}}$$

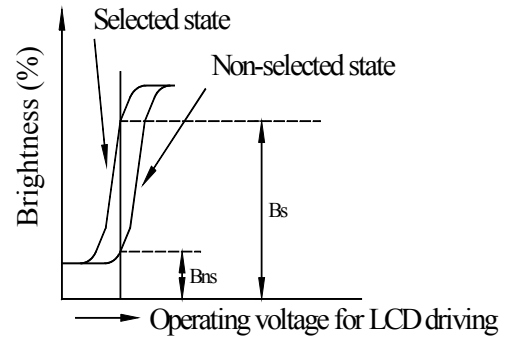


■ Response time

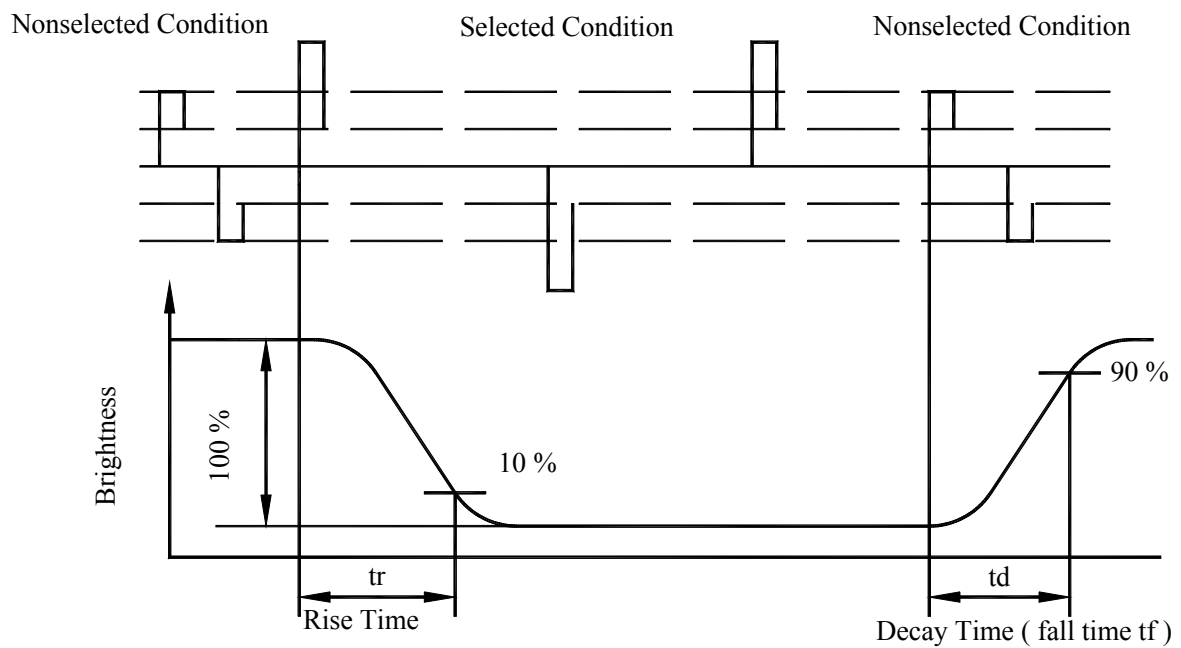

6. Interface Description

Pin No.	Symbol	Level	Description
1	FLM	H/L	First line marker
2	M	H/L	Frame reverse signal
3	LP	H to L	Data latch pulse
4	CP	H to L	Data shift pulse
5	$\overline{\text{DISPOFF}}$	H/L	H: Display ON, L: Display OFF
6	DB0	H/L	Display data, bit0
7	DB1	H/L	Display data, bit1
8	DB2	H/L	Display data, bit2
9	DB3	H/L	Display data, bit3
10	VDD	5.0V	Power supply for Logic (option +3V)
11	VSS	0V	Ground
12	VEE		Negative Voltage -25V(option)
13	V _O	(Variable)	Driving voltage for LCD
14	FGND		Frame Ground

7. Block Diagram

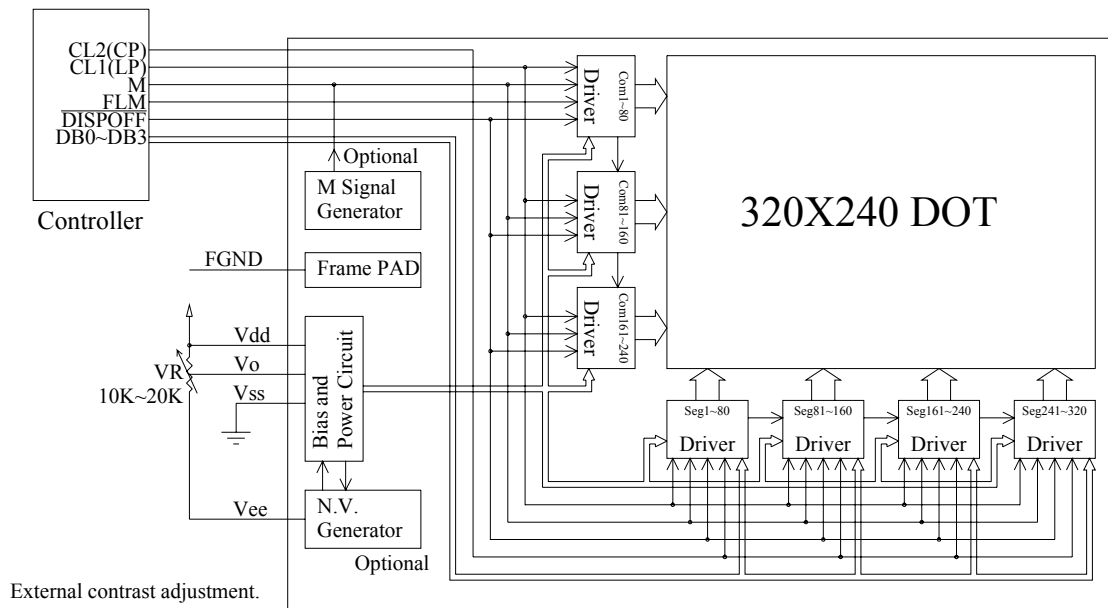

8. Timing Characteristics

Item	symbol	Test Condition	Min.	Typ.	Max.	Units
Clock Cycle	tC	Fig.1	100	—	—	ns
CP Pulse Width	tWC	Fig.1	50	—	—	ns
LP Pulse Width	tWL	Fig.1	50	—	—	ns
Data Set Up Time	tDSU	Fig.1	30	—	—	ns
Data Hold Time	tDHD	Fig.1	30	—	—	ns
CP Rise/Fall Time	tr,tf	Fig.1	—	—	50	ns
CP to LOAD	tCL	Fig.1	80	—	—	ns
LOAD to CP	tLC	Fig.1	110	—	—	ns
LP Pulse Width	tLW	Fig.1	50	—	—	ns
CL1 Pulse Width	tCW	Fig.2	63	—	—	ns
Data Set Up Time	tDSU2	Fig.2	100	—	—	ns
Data Hold Time	tDHD2	Fig.2	100	—	—	ns
CL1 Rise/Fall Time	tr2,tf2	Fig.2	—	—	50	ns

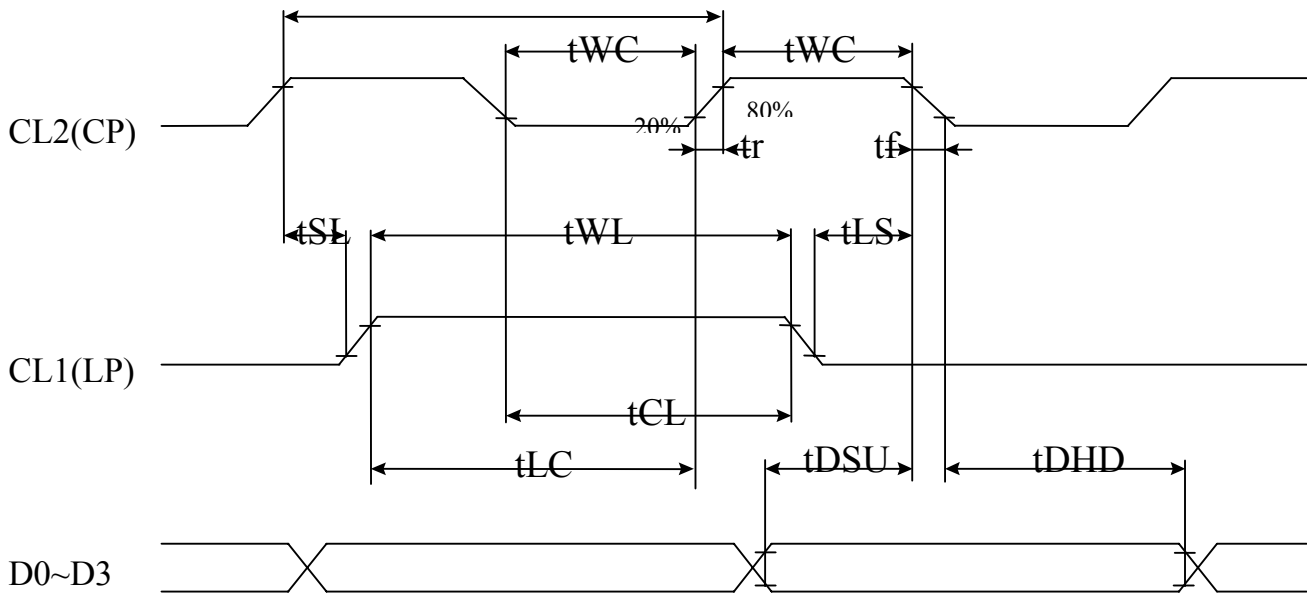


Fig 1. SEGMENT TIMING


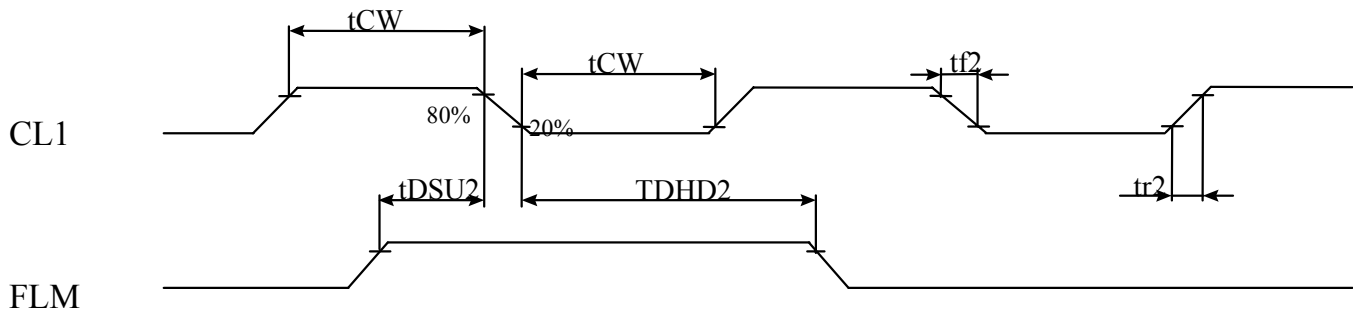



Fig 2 COMMON TIMING

9. Power Supply for LCD Module and LCD Operating Voltage a Adjustment


*(Optional) LCM operating on " DC 5V " input with external negative voltage

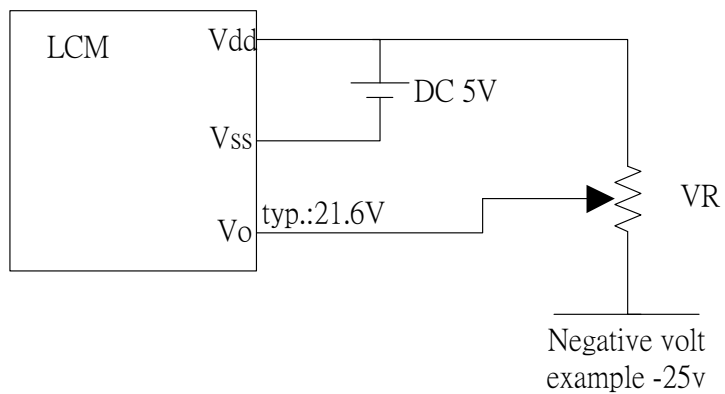


*(Optional) LCM operating on "DC 5V" input with built-in negative voltage

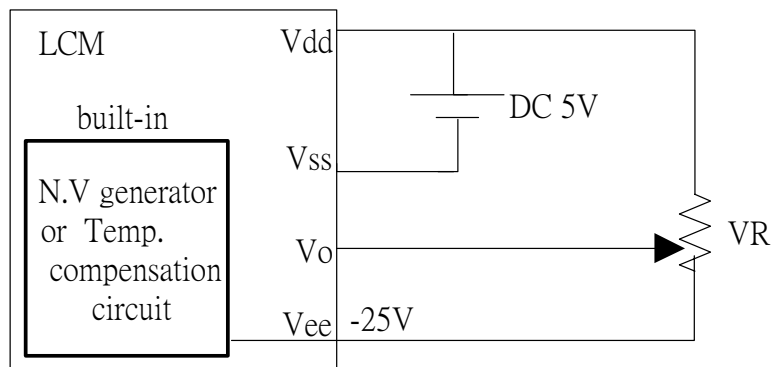

*(Optional) LCM operating on " DC 3V " input with external negative voltage

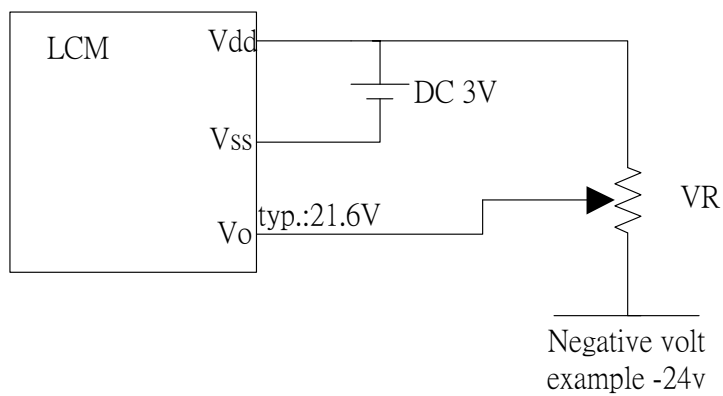

* (Optional) LCM operating on "DC 3V" input with built-in negative voltage

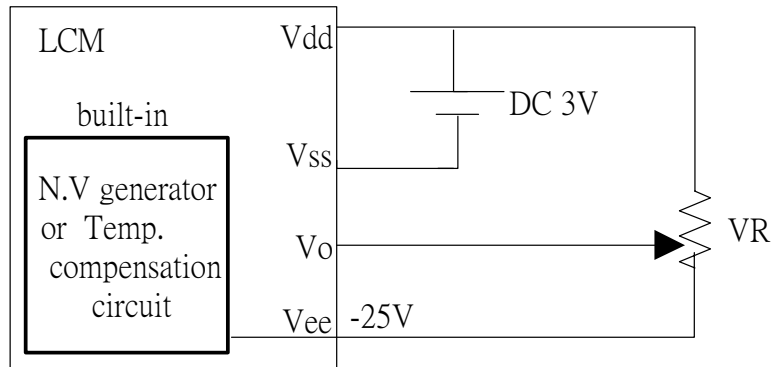

10. Backlight Information

10.1 Specification

(1) LED bottom / yellow-green

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I _{LED}	—	720		mA	V=4.2V
Supply Voltage	V	—	4.2	4.6	V	—
Reverse Voltage	V _R	—	—	8	V	—
Luminous Intensity	I _V	80	100	—	cd/m ²	I _{LED} =720mA
Wave Length	λ _p	—	570	572	nm	I _{LED} =720mA
Life Time	—	—	100000	—	Hr.	V ≤ 4.2V
Color	Yellow-green					

(2) LED edge / white

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I _{LED}	—	160	—	mA	V=3.5V
Supply Voltage	V	—	3.5	3.5	V	—
Reverse Voltage	V _R	—	—	10	V	—
Luminous Intensity	I _V	—	23	—	cd/m ²	I _{LED} =160mA
Wave Length	λ _p	—	—	—	nm	I _{LED} =160mA
Life Time	—	—	70000	—	Hr.	V ≤ 3.6V
Color	White					

(3) EL / white

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Drive Voltage	V _{max}	—	110	170	V _{rms}	25°C
Drive Wave	F _{max}	—	400	1000	Hz	25°C
Brightness		35	—	—	cd/m ²	110V/400Hz
Power Consumption		—	280.6	—	mW	110V/400Hz
Chromatism	X	—	0.330	—	—	110V/400Hz
	Y	—	0.365	—	—	110V/400Hz
Life time			5000		hour	110V/400Hz
Color			White		—	Light on 110V/400Hz

(4) CCFL / white

(Ta=25°C)


Item	Symbol	Specification			Unit	Condition
		Min	Typ	Max		
Driving Voltage	V_{FL}	—	278	—	Vrms	—
Input current	I_{FL}	3.0	5.0	6.0	mA rms	—
Power consumption	W	—	1.35	—	W	—
Starting Voltage	V_{FLS}	—	530	—	Vrms	—
Luminance	L	—	550	—	Cd/m ²	$\varphi, \theta = 0 \text{ deg}, I_{FL} = 5.0 \text{ mA rms}$
Chromaticity	x	—	0.340	—	—	—
	y	—	0.370	—	—	—
Luminance Uniformity (Testing 9 point)	—	75%	—	—	%	$\varphi, \theta = 0 \text{ deg}, I_{FL} = 5.0 \text{ mA rms}$
Life time	—	15000	—	—	hrs	

10.2 Backlight driving methods

a. LED B/L driven from A.K cable directly


a.1 bottom (yellow-green)

LCM

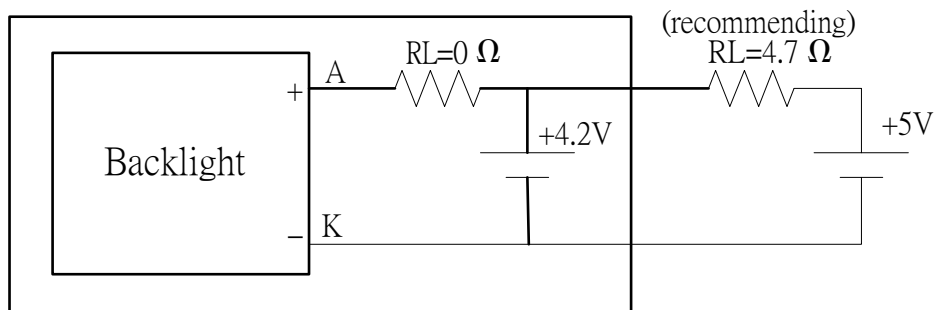


a.2 edge (white)


LCM

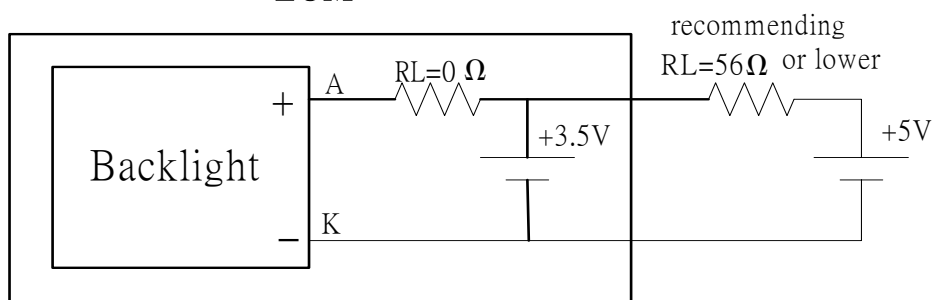


b.EL B/L drive from A.K directly

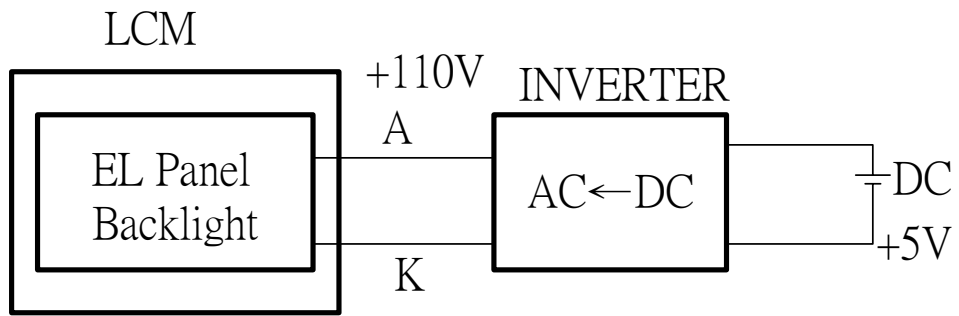

c. CCFL B/L driven from A.K cable directly
type1:

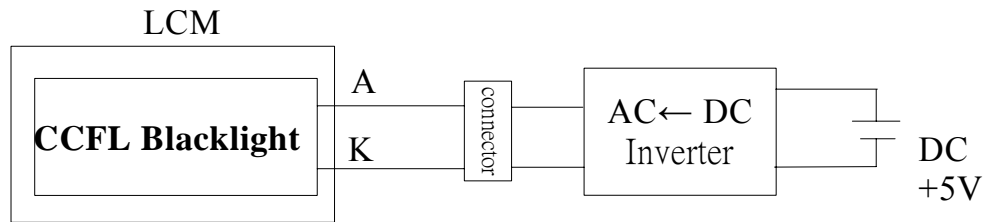


type2:

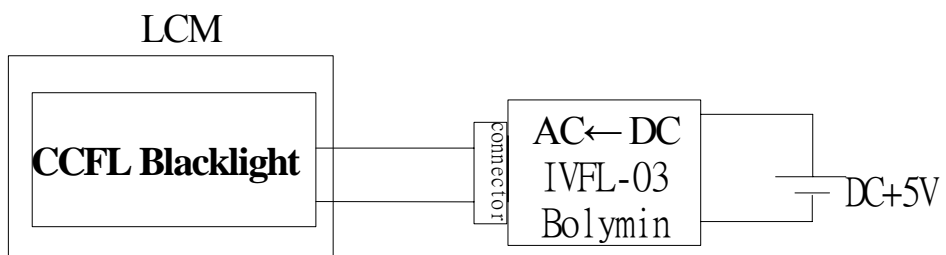

10.3 CCFL INVENTER DATA (P/N:IVFL-03)

As shown on next page

11.Touch panel Information

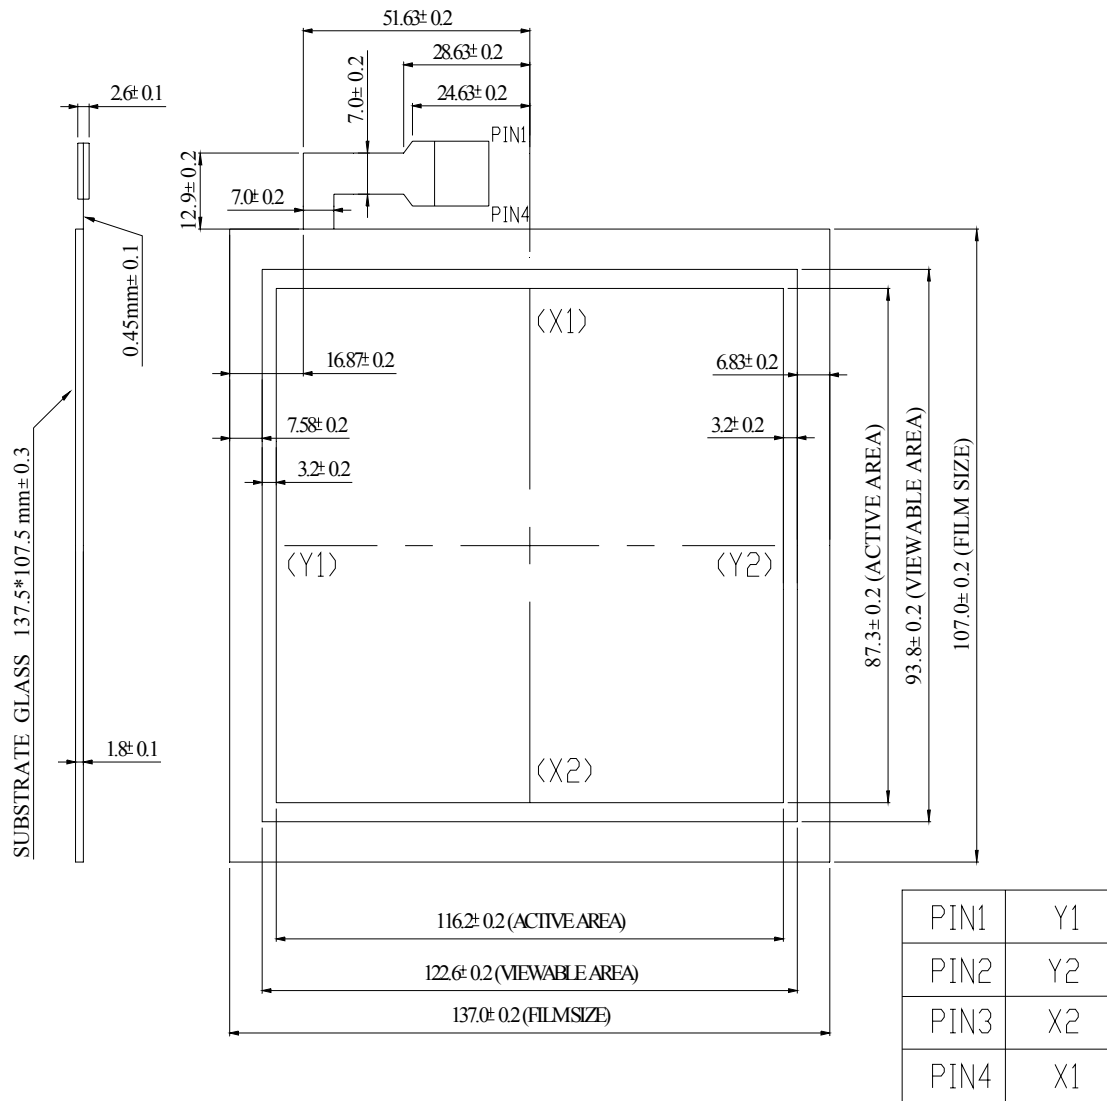

11.1 Electrical Specifications

Item	Specification	Condition
On Resistance	250 Ω ~ 750 Ω	Direction :X
	250 Ω ~ 800 Ω	Direction :Y
Insulation Resistance	More Than 20M Ω	DC 25V
Chattering Time	Less Than 10 msec	100K Ω Pull-Up
Linearity	$\pm 1.0\%$	X AXIS
	$\pm 1.0\%$	Y AXIS

11.2 Machine Specifications

Item	Specification	Condition
Operating Force	Less Than 80g	R8.0 HS 40 ° Silicon Rubber Or R0.8 POLYACETAL PEN
Surface Hardness	More Than 2H	Pencil Test
Light Transmission	More Than 80 %	@550nm HITACHI U3300
Durability For Pen Selections	More Than 1,200,000 Times	Force:250g Speed:2cm/sec


12. Quality Assurance

◆ Screen Cosmetic Criteria

No.	Defect	Judgement Criterion	Partition																				
1	Spots	<p>A)Clear</p> <table border="1"> <thead> <tr> <th>Size: d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>$d \leq 0.1$</td> <td>Disregard</td> </tr> <tr> <td>$0.1 < d \leq 0.2$</td> <td>6</td> </tr> <tr> <td>$0.2 < d \leq 0.3$</td> <td>2</td> </tr> <tr> <td>$0.3 < d$</td> <td>0</td> </tr> </tbody> </table> <p>Note: Including pin holes and defective dots which must be within one pixel size.</p> <p>B)Unclear</p> <table border="1"> <thead> <tr> <th>Size: d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>$d \leq 0.2$</td> <td>Disregard</td> </tr> <tr> <td>$0.2 < d \leq 0.5$</td> <td>6</td> </tr> <tr> <td>$0.5 < d \leq 0.7$</td> <td>2</td> </tr> <tr> <td>$0.7 < d$</td> <td>0</td> </tr> </tbody> </table>	Size: d mm	Acceptable Qty in active area	$d \leq 0.1$	Disregard	$0.1 < d \leq 0.2$	6	$0.2 < d \leq 0.3$	2	$0.3 < d$	0	Size: d mm	Acceptable Qty in active area	$d \leq 0.2$	Disregard	$0.2 < d \leq 0.5$	6	$0.5 < d \leq 0.7$	2	$0.7 < d$	0	Minor
Size: d mm	Acceptable Qty in active area																						
$d \leq 0.1$	Disregard																						
$0.1 < d \leq 0.2$	6																						
$0.2 < d \leq 0.3$	2																						
$0.3 < d$	0																						
Size: d mm	Acceptable Qty in active area																						
$d \leq 0.2$	Disregard																						
$0.2 < d \leq 0.5$	6																						
$0.5 < d \leq 0.7$	2																						
$0.7 < d$	0																						
2	Bubbles in Polarize	<table border="1"> <thead> <tr> <th>Size: d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>$d \leq 0.3$</td> <td>Disregard</td> </tr> <tr> <td>$0.3 < d \leq 1.0$</td> <td>3</td> </tr> <tr> <td>$1.0 < d \leq 1.5$</td> <td>1</td> </tr> <tr> <td>$1.5 < d$</td> <td>0</td> </tr> </tbody> </table>	Size: d mm	Acceptable Qty in active area	$d \leq 0.3$	Disregard	$0.3 < d \leq 1.0$	3	$1.0 < d \leq 1.5$	1	$1.5 < d$	0	Minor										
Size: d mm	Acceptable Qty in active area																						
$d \leq 0.3$	Disregard																						
$0.3 < d \leq 1.0$	3																						
$1.0 < d \leq 1.5$	1																						
$1.5 < d$	0																						
3	Scratch	In accordance with spots cosmetic criteria. When the light reflects on the panel surface, the scratches are not to be remarkable.	Minor																				
4	Allowable Density	Above defects should be separated more than 30mm each other.	Minor																				
5	Coloration	Not to be noticeable coloration in the viewing area of the LCD panels. Back-light type should be judged with back-light on state only.	Minor																				


13. Reliability

Content of Reliability Test

Environmental Test				
No.	Test Item	Content of Test	Test Condition	Applicable Standard
1	High Temperature storage	Endurance test applying the high storage temperature for a long time.	60°C 200hrs	—
2	Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-10°C 200hrs	—
3	High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	50°C 200hrs	—
4	Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	0°C 200hrs	—
5	High Temperature/ Humidity Storage	Endurance test applying the high temperature and high humidity storage for a long time.	60°C,90%RH 96hrs	—
6	High Temperature/ Humidity Operation	Endurance test applying the electric stress (Voltage & Current) and temperature / humidity stress to the element for a long time.	50°C,90%RH 96hrs	—
7	Temperature Cycle	Endurance test applying the low and high temperature cycle.  1 cycle	-10°C/60°C 10 cycles	—
Mechanical Test				
8	Vibration test	Endurance test applying the vibration during transportation and using.	10~22Hz→1.5mmp-p 22~500Hz→1.5G Total 0.5hrs	—
9	Shock test	Constructional and mechanical endurance test applying the shock during transportation.	50G Half sign wave 11 msdc 3 times of each direction	—
10	Atmospheric pressure test	Endurance test applying the atmospheric pressure during transportation by air.	115mbar 40hrs	—
Others				
11	Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V,RS=1.5kΩ CS=100pF 1 time	—

***Supply voltage for logic system=5V. Supply voltage for LCD system =Operating voltage at 25°C

14. Drawing

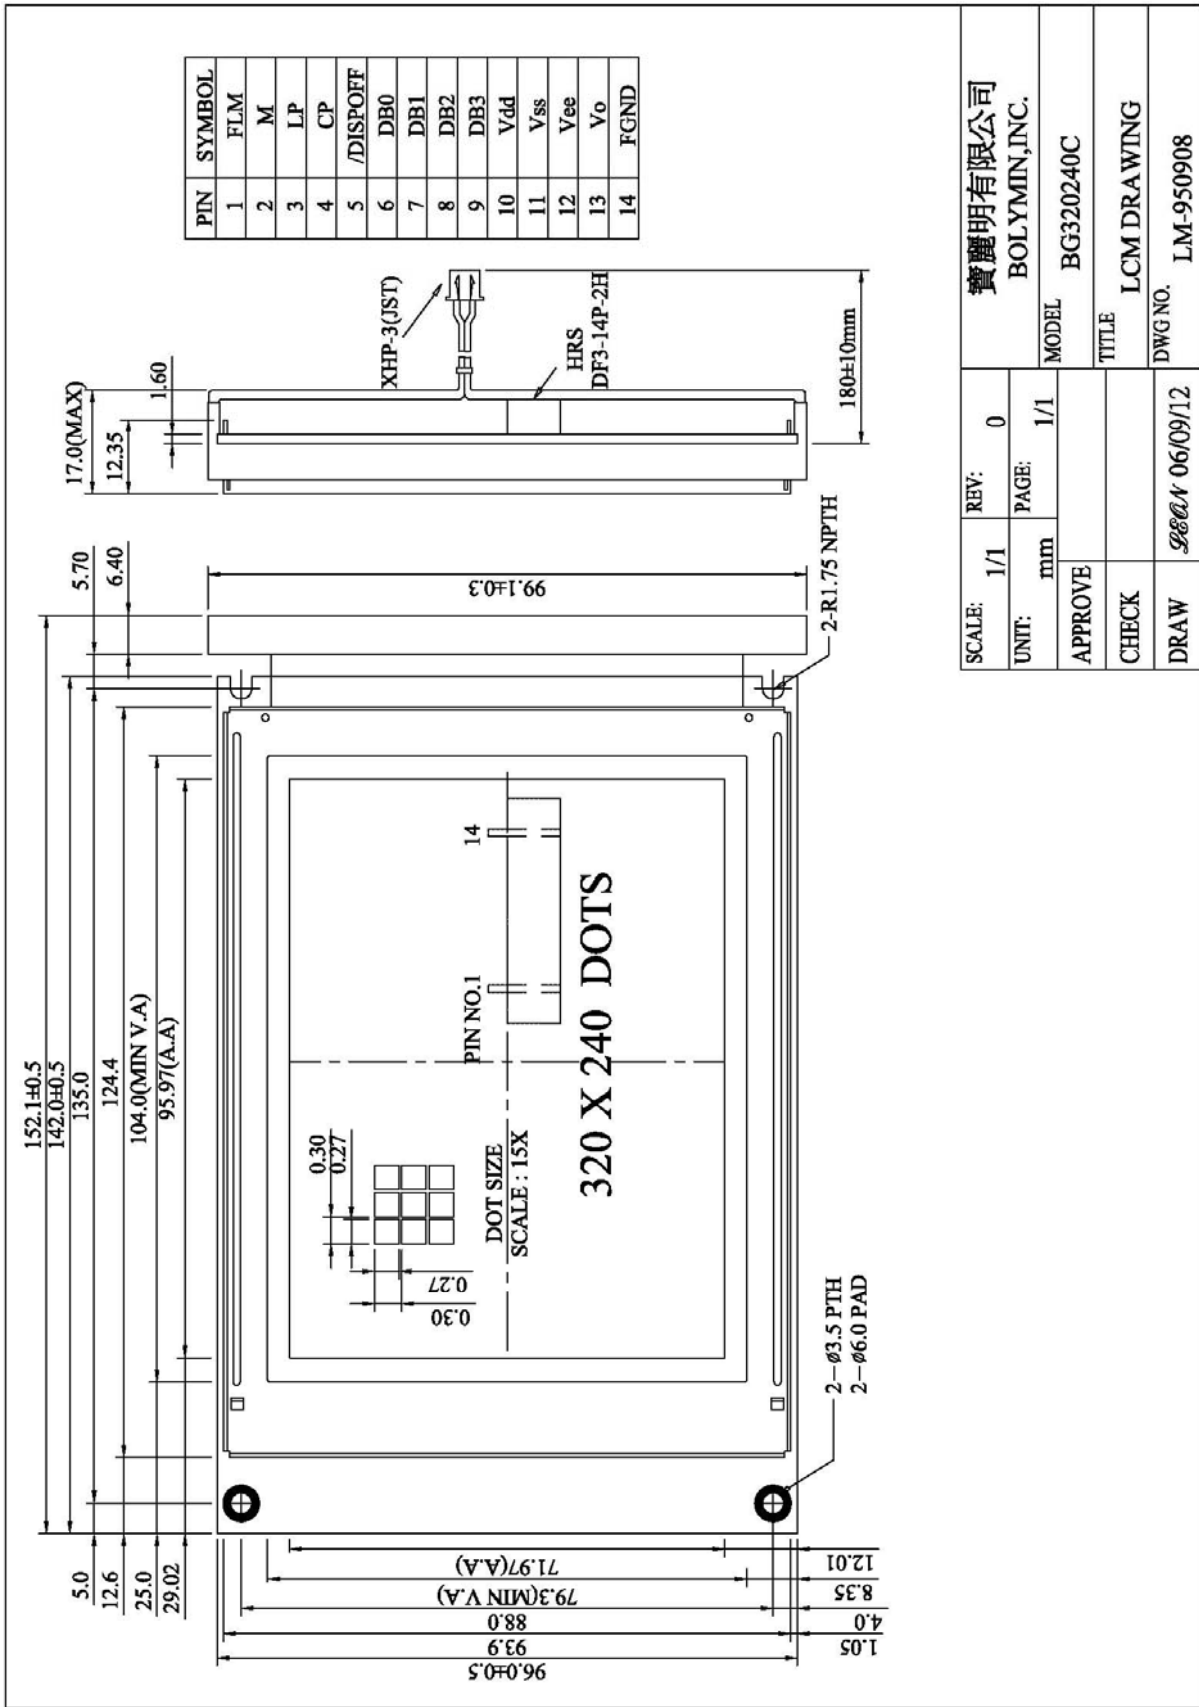

SCALE:	REV:	0
UNIT:	PAGE:	1/1
APPROVE	MODEL	BG320240C
CHECK	TITLE	LCM DRAWING
DRAW	DWG NO.	LM-950908

寶麗明有限公司
 BOLYMIN, INC.
 MODEL BG320240C
 TITLE LCM DRAWING
 DWG NO. LM-950908