



## IEC Connector EN60320 C14

# 0707-1 Series

### Unique Features:

Ensure Free of

- Discontinuity
- Short Circuit on Rear Plane
- Hi-Pot Breaking
- Arcing

**Power Rating :** 10A 250V AC European, 15A 250V AC  
UL & CSA

**Insulation Resistance :** over 100MΩ 500V DC

**Withstanding Voltage :** 2,000V AC One Minute




**Operating Rating Temperature :** -25°C to +85°C

**Main Unit Material :** Thermoplastic UL Flammability  
94V-0 & Copper Alloy



## Power Inlet

Unit:mm

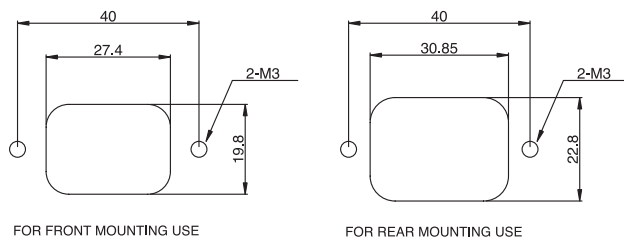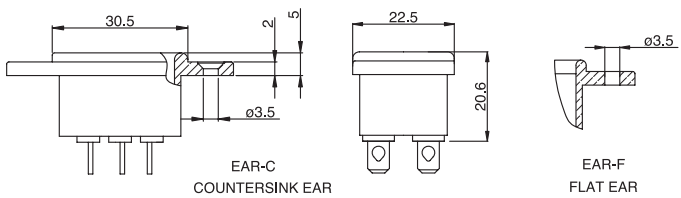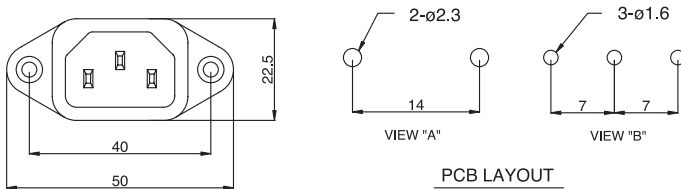

**PANEL CUT-OUT**

| ORDER NO.            | CODE | TERMINAL OPTION                         |
|----------------------|------|---|
| 0707-1-CS, 0707-1-FS | S    | 2.5mm/SOLDER TAB<br>                    |
| 0707-1-CN, 0707-1-FN | N    | 4.0mm/SOLDER TAB<br>                    |
| 0707-1-CQ, 0707-1-FQ | Q    | 4.8mm/.187"<br>Q.D./SOLDER TAB<br>      |
| 0707-1-CW, 0707-1-FW | W    | 6.3mm/.250"<br>FAST-ON TAB<br>          |
| 0707-1-CL2           | L2   | N,L PIN U TYPE<br>                      |
| 0707-1-CP            | P    | FOR PCB (VIEW "A")<br>MOUNTING(N,L)<br> |
| 0707-1-C7            | P    | E PIN SOLDER<br>(VIEW "B")<br>          |

C: EAR-C F: EAR-F

