



IEC Connector EN60320 C14 and Sheet F

0712 Series

Power Rating : 10A 250V AC European, 15A 250V AC UL & CSA

Insulation Resistance : over 100MΩ 500V DC

Withstanding Voltage : 2,000V AC One Minute

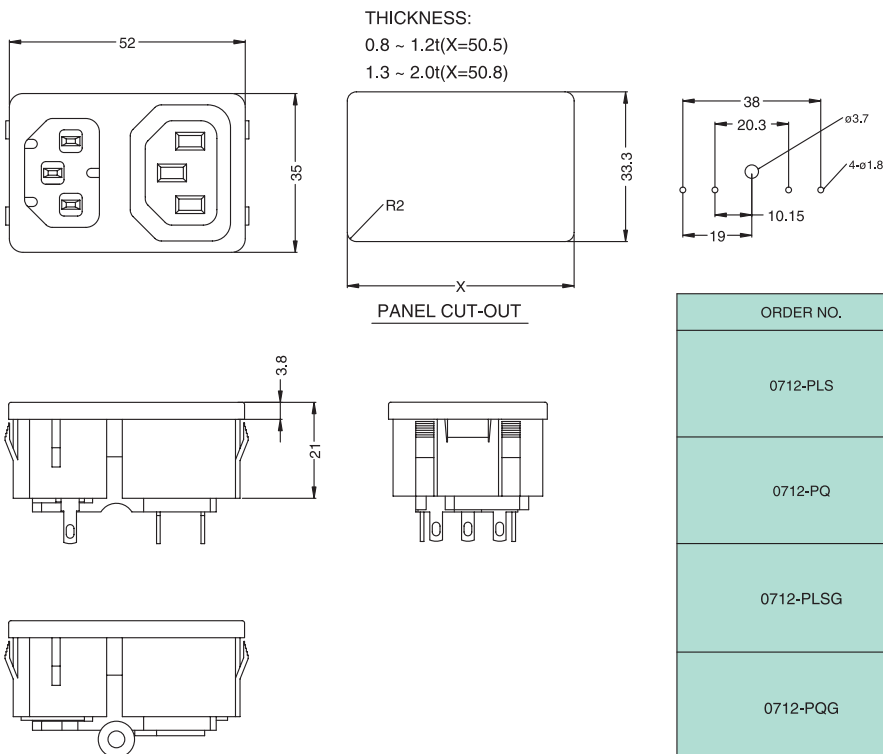
Operating Rating Temperature : -25°C to +85°C



Main Unit Material : Thermoplastic UL Flammability 94V-0 & Copper Alloy



Module

Unit:mm



ORDER NO.	CODE	TERMINAL OPTION
0712-PLS	LS	$\phi 1.5 \times 3.0 \text{L}$ 2.8mm/SOLDER TAB 
0712-PQ	Q	$\phi 2.8 \times 3.3 \text{L}$ 4.8mm/.187" Q.D./SOLDER TAB 
0712-PLSG	LSG	INLET/OUTLET GROUNDING TERMINALS OF COMBINATION
0712-PQG	QG	