


REMARK **RoHS Compliant**


1. Glass Thk: 1.8mm
2. Film Type: Non-Glare
3. Total Thk: 2.05±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance  
 100 < Y < 1200 ohm  
 100 < X < 1200 ohm
7. Connector: FPC
8. General Tolerance: ±0.5

▲ CIRCUIT DIAGRAM  
 ▲ SIGNAL ASSIGNMENT

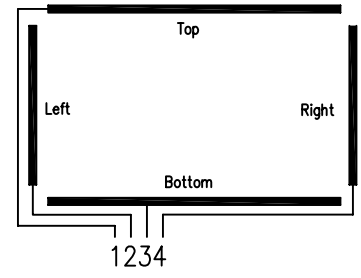

Pin No	Signal
1	TOP
2	LEFT
3	BOTTOM
4	RIGHT

Detail "AA"

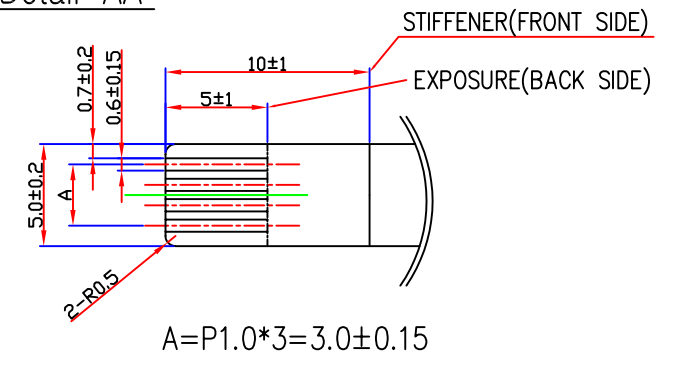

**NOTE:** The HantouchUSA Incoming Inspection Standard is part of this drawing.  
 This quality and performance document can be viewed at:  
[www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW	STD.TOL	UNIT	mm	DRAWING NO.	REV.
2	▲ Add a FPC	07.01.02	H.Y. IM	K.B. KIM	Y. J. OH	APPROVE				H5121A-NEOFB87	2
1	▲ O/D Change	06.12.23	H.Y. IM	K.B. KIM	M. G. JO	CHECK		SCALE	NONE		
0	NEW DRAW	06.12.21	H.Y. IM	K.B. KIM	M. G. JO	DESIGN				DESCRIPTION	SHEET
										12.1" TOUCH PANEL	1/1

