



REV.NO.	REVISED	DATE	DRAWN	CHECKED	APPROVED
0	NEW DRAW	03.02.07	J.H.LEE		

REMARK

- 1.Glass Thk :1.1mm
- 2.Film Type: Non-Glare
- 3.Total Thk:  $1.35 \pm 0.15$
- 4.Linearity:  $\pm 1.8\%$  or less
- 5.Transmittance: 80% or more
- 6.Resistance  
 $200 < \text{Glass}(Y) < 1200 \text{ ohm}$   
 $200 < \text{Film}(X) < 900 \text{ ohm}$
- 7.Connector: FPC

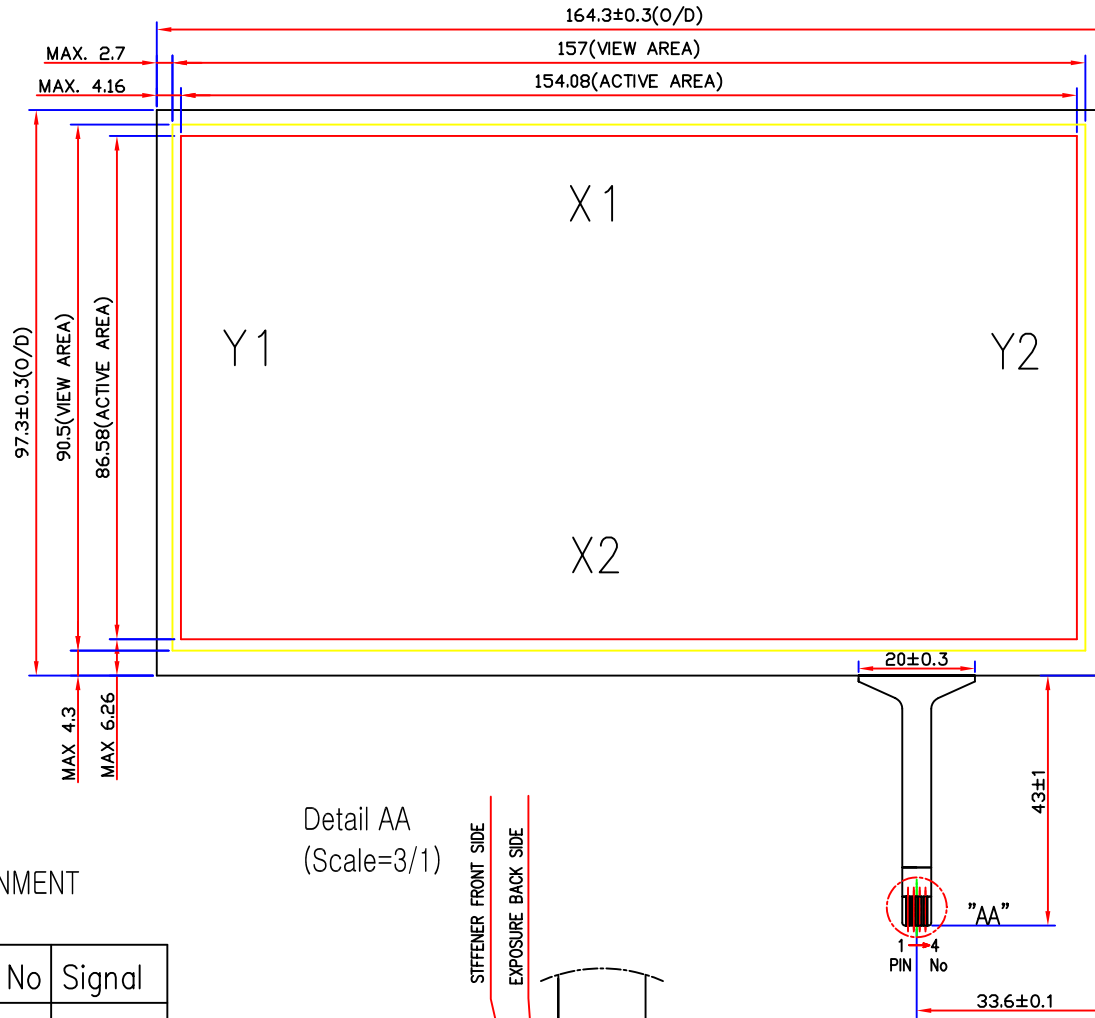


CIRCUIT DIAGRAM

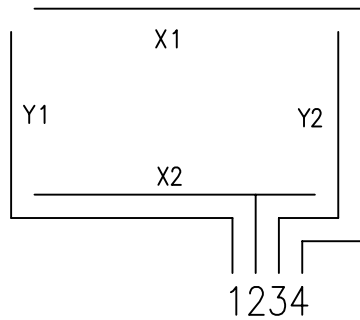

SIGNAL ASSIGNMENT

Pin No	Signal
1	Y1
2	X2
3	Y2
4	X1

Detail AA  
(Scale=3/1)

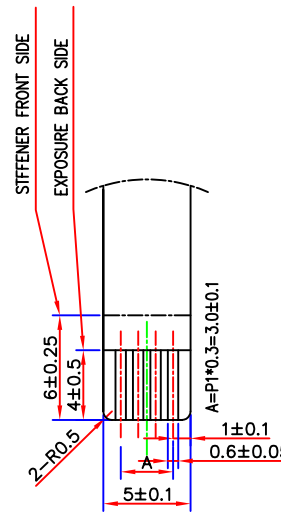

**NOTE:** The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: [www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

APPROVE	UNIT	mm	PROJECTION	DRAWING NO.	REV.
	SCALE	NONE		H8070A-ND0FG45	
DESIGN	Han touch USA Touch Screen Specialists			DESCRIPTION	SHEET
DRAW				7.0 TOUCH PANEL	1/1